



**Model: 24160CC/W33**

Basic size of  
 mm

d:	300
D:	500
B:	200

The basic rated load is  
 kN

trends C:	3750
static state Co:	6300
Fatigue load limit	465
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	700
limit speed:	1000
quality:	160

model

Column hole:	*24160CC/W33
conical bore:	*24160CCK30/W33

Dimensions are  
 mm


d:	300
d <sub>2</sub> ~ :	338
D1 ~ :	422
b:	13.9
k:	7.5
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	320
Da the max:	480
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.4
----	-----

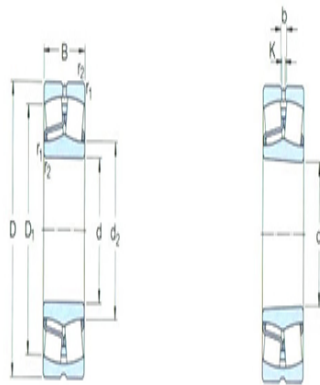

Y1:	1.7
Y2:	2.5
Y0:	1.6