



Model: 22260CC/W33

Basic size of
mm

d:	300
D:	540
B:	140

The basic rated load is
kN

trends C:	3150
static state Co:	4250
Fatigue load limit Pu:	325

Rated rotation speed is
r/min

Refer to the speed:	1000
limit speed:	1400
quality:	145

model

Column hole:	*22260CC/W33
conical bore:	*22260CCK/W33

Dimensions are
mm


d:	300
d ₂ ~ :	354
D1 ~ :	477
b:	22.3
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size
mm

d _a the min:	320
Da the max:	520
r _a the max:	4

Calculation coefficient

e:	0.26
Y1:	2.6

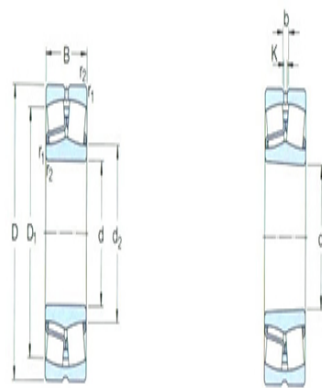

Y2:	3.9
Y0:	2.5