



**Model: 24064CC/W33**

Basic size of  
 mm

d:	320
D:	480
B:	160

The basic rated load is  
 kN

trends C:	2850
static state Co:	5100
Fatigue load limit	400
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	800
limit speed:	1200
quality:	100

model

Column hole:	*24064CC/W33
conical bore:	*24064CCK30/W33
	3

Dimensions are  
 mm



d:	320
d <sub>2</sub> ~ :	354
D1 ~ :	423
b:	13.9
k:	7.5
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	335
Da the max:	465
r <sub>a</sub> the max:	3

Calculation coefficient

e:	0.31
----	------

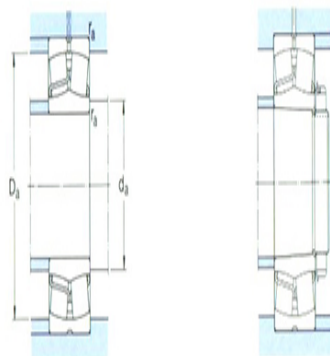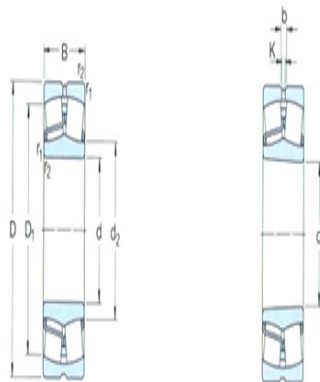

Y1:	2.2
Y2:	3.3
Y0:	2.2