



Model: 24168ECCJ/W33

Basic size of
 mm

d:	340
D:	580
B:	243

The basic rated load is
 kN

trends C:	5300
static state Co:	8650
Fatigue load limit Pu:	630

Rated rotation speed is
 r/min

Refer to the speed:	600
limit speed:	850
quality:	280

model

Column hole:	*24168ECCJ/W33
conical bore:	*24168ECCK30J/W3 3

Dimensions are
 mm


d:	340
d ₂ ~ :	383
D1 ~ :	491
b:	16.7
k:	9
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	360
Da the max:	560
r _a the max:	4

Calculation coefficient

e:	0.4
----	-----

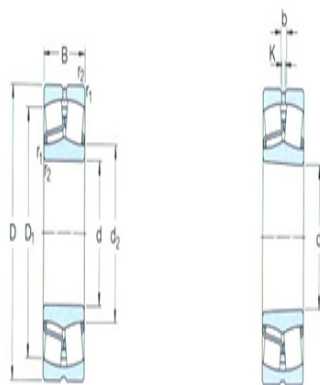

Y1:	1.7
Y2:	2.5
Y0:	1.6