



Model: 24056CCK30/W33

Basic size of
 mm

d:	280
D:	420
B:	140

The basic rated load is
 kN

trends C:	2160
static state Co:	3800
Fatigue load limit	285
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	950
limit speed:	1400
quality:	69.5

model

Column hole:	*24056CC/W33
conical bore:	*24056CCK30/W33
	3

Dimensions are
 mm



d:	280
d ₂ ~ :	309
D1 ~ :	368
b:	11.1
k:	6
r _{1,2} the min:	4

Shoulder gear and chamfer size
 mm

d _a the min:	295
Da the max:	405
r _a the max:	3

Calculation coefficient

e:	0.31
----	------

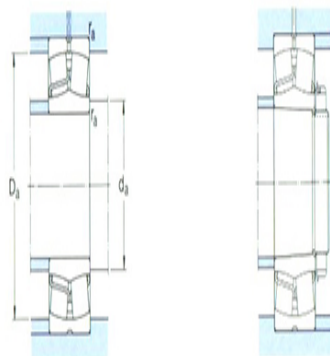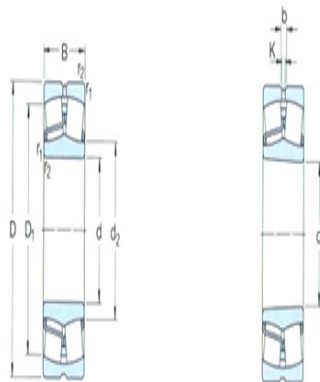

Y1:	2.2
Y2:	3.3
Y0:	2.2