



Model: 24156CCK30/W33

Basic size of
 mm

d:	280
D:	460
B:	180

The basic rated load is
 kN

trends C:	3100
static state Co:	5100
Fatigue load limit	415
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	800
limit speed:	1100
quality:	120

model

Column hole:	*24156CC/W33
conical bore:	*24156CCK30/W33
	3

Dimensions are
 mm


d:	280
d ₂ ~ :	314
D1 ~ :	390
b:	13.9
k:	7.5
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	300
Da the max:	440
r _a the max:	4

Calculation coefficient

e:	0.4
----	-----

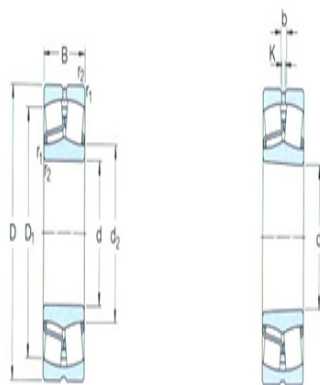

Y1:	1.7
Y2:	2.5
Y0:	1.6