



Model: 22256CCK/W33

Basic size of
mm

d:	280
D:	500
B:	130

The basic rated load is
kN

trends C:	2700
static state Co:	3750
Fatigue load limit Pu:	300

Rated rotation speed is
r/min

Refer to the speed:	1100
limit speed:	1500
quality:	115

model

Column hole:	*22256CC/W33
conical bore:	*22256CCK/W3 3

Dimensions are
mm



d:	280
d ₂ ~ :	333
D1 ~ :	441
b:	22.3
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size
mm

d _a the min:	300
Da the max:	480
r _a the max:	4

Calculation coefficient

e:	0.26
Y1:	2.6

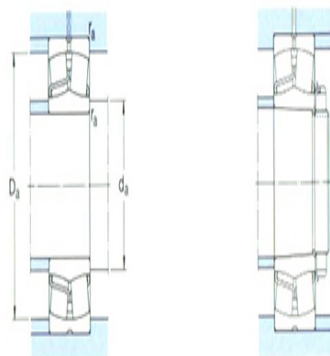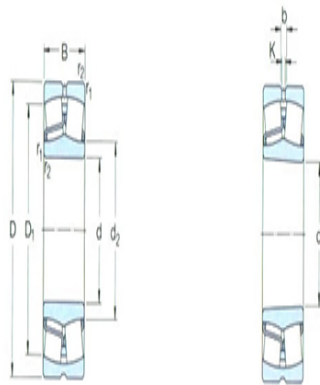

Y2:	3.9
Y0:	2.5