



**Model: 23256CCK/W33**

Basic size of  
 mm

d:	280
D:	500
B:	176

The basic rated load is  
 kN

trends C:	3250
static state Co:	4900
Fatigue load limit Pu:	365

Rated rotation speed is  
 r/min

Refer to the speed:	800
limit speed:	1100
quality:	150

model

Column hole:	*23256CC/W33
conical bore:	*23256CCK/W33

Dimensions are  
 mm



d:	280
d <sub>2</sub> ~ :	332
D1 ~ :	429
b:	22.3
k:	12
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	300
Da the max:	480
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.35
Y1:	1.9

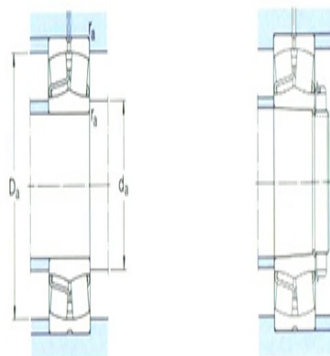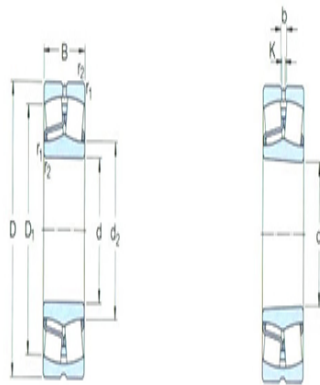

Y2:	2.9
Y0:	1.8