



**Model: 22356CCK/W33**

Basic size of  
mm

d:	280
D:	580
B:	175

The basic rated load is  
kN

trends C:	4000
static state Co:	5200
Fatigue load limit Pu:	365

Rated rotation speed is  
r/min

Refer to the speed:	800
limit speed:	1100
quality:	235

model

Column hole:	*22356CC/W33
conical bore:	*22356CCK/W33

Dimensions are  
mm


d:	280
d <sub>2</sub> ~ :	354
D1 ~ :	492
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	306
Da the max:	554
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.3
Y1:	2.3

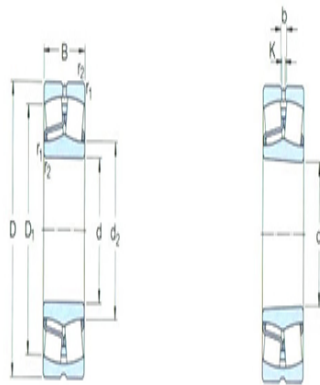

Y2:	3.4
Y0:	2.2