



**Model: 24060CCK30/W33**

Basic size of  
mm

d:	300
D:	460
B:	160

The basic rated load is  
kN

trends C:	2700
static state Co:	4750
Fatigue load limit	355
Pu:	

Rated rotation speed is  
r/min

Refer to the speed:	850
limit speed:	1200
quality:	97

model

Column hole:	*24060CC/W33
conical bore:	*24060CCK30/W33
	3

Dimensions are  
mm


d:	300
d <sub>2</sub> ~ :	331
D1 ~ :	400
b:	13.9
k:	7.5
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	315
Da the max:	445
r <sub>a</sub> the max:	3

Calculation coefficient

e:	0.33
----	------

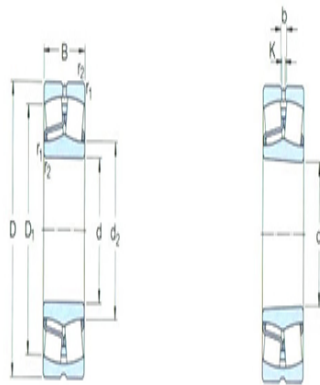

Y1:	2
Y2:	3
Y0:	2