



Model: 23160CCK/W33

Basic size of
mm

d:	300
D:	500
B:	160

The basic rated load is
kN

trends C:	3200
static state Co:	5100
Fatigue load limit Pu:	380

Rated rotation speed is
r/min

Refer to the speed:	950
limit speed:	1200
quality:	125

model

Column hole:	*23160CC/W33
conical bore:	*23160CCK/W33

Dimensions are
mm


d:	300
d ₂ ~ :	345
D1 ~ :	434
b:	16.7
k:	9
r _{1,2} the min:	5

Shoulder gear and chamfer size
mm

d _a the min:	320
Da the max:	480
r _a the max:	4

Calculation coefficient

e:	0.3
Y1:	2.3

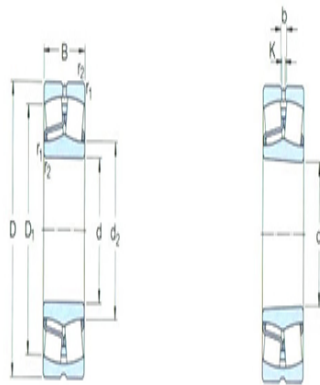

Y2:	3.4
Y0:	2.2