



Model: 24160CCK30/W33

Basic size of
 mm

d:	300
D:	500
B:	200

The basic rated load is
 kN

trends C:	3750
static state Co:	6300
Fatigue load limit	465
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	700
limit speed:	1000
quality:	160

model

Column hole:	*24160CC/W33
conical bore:	*24160CCK30/W33
	3

Dimensions are
 mm



d:	300
d ₂ ~ :	338
D1 ~ :	422
b:	13.9
k:	7.5
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	320
Da the max:	480
r _a the max:	4

Calculation coefficient

e:	0.4
----	-----

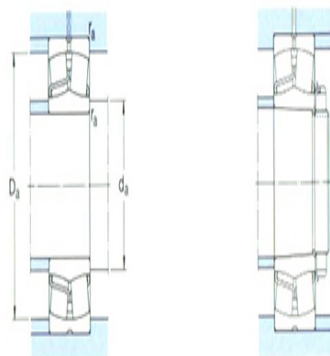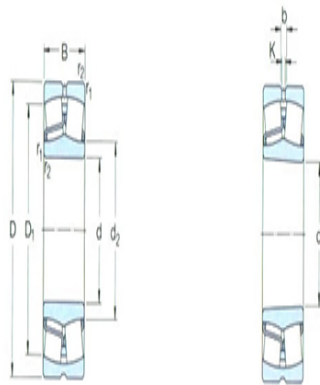

Y1:	1.7
Y2:	2.5
Y0:	1.6