



**Model: 23260CCK/W33**

Basic size of  
mm

d:	300
D:	540
B:	192

The basic rated load is  
kN

trends C:	3900
static state Co:	5850
Fatigue load limit Pu:	425

Rated rotation speed is  
r/min

Refer to the speed:	750
limit speed:	1000
quality:	190

model

Column hole:	*23260CC/W33
conical bore:	*23260CCK/W33

Dimensions are  
mm



d:	300
d <sub>2</sub> ~ :	356
D1 ~ :	461
b:	22.3
k:	12
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	320
Da the max:	520
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.35
Y1:	1.9

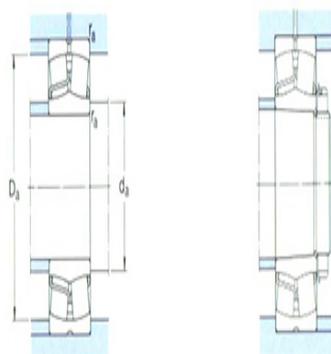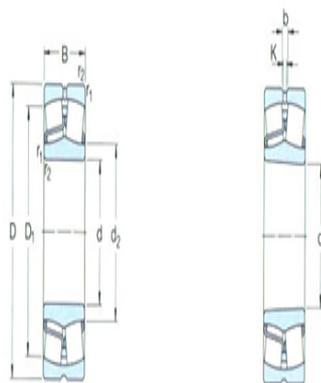

Y2:	2.9
Y0:	1.8