



**Model: 23064CCK/W33**

Basic size of  
mm

d:	320
D:	480
B:	121

The basic rated load is  
kN

trends C:	2240
static state Co:	3800
Fatigue load limit Pu:	285

Rated rotation speed is  
r/min

Refer to the speed:	1100
limit speed:	1400
quality:	78

model

Column hole:	*23064CC/W33
conical bore:	*23064CCK/W33

Dimensions are  
mm



d:	320
d <sub>2</sub> ~ :	360
D1 ~ :	434
b:	16.7
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	335
Da the max:	465
r <sub>a</sub> the max:	3

Calculation coefficient

e:	0.23
Y1:	2.9

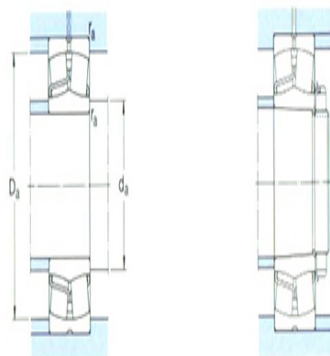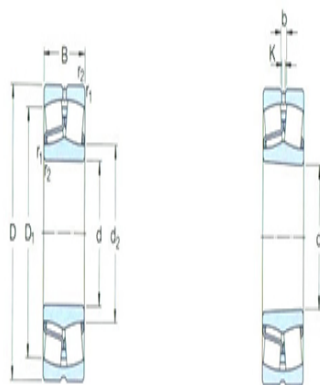

Y2:	4.4
Y0:	2.8