



Model: 24164CCK30/W33

Basic size of
 mm

d:	320
D:	540
B:	218

The basic rated load is
 kN

trends C:	4250
static state Co:	7100
Fatigue load limit	510
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	670
limit speed:	900
quality:	210

model

Column hole:	*24164CC/W33
conical bore:	*24164CCK30/W33
	3

Dimensions are
 mm



d:	320
d ₂ ~ :	364
D1 ~ :	455
b:	16.7
k:	9
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	340
Da the max:	520
r _a the max:	4

Calculation coefficient

e:	0.4
----	-----

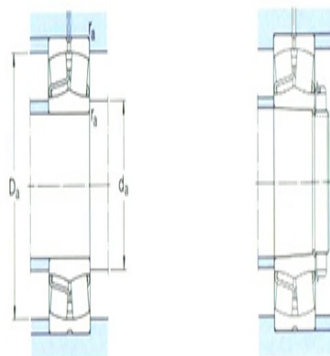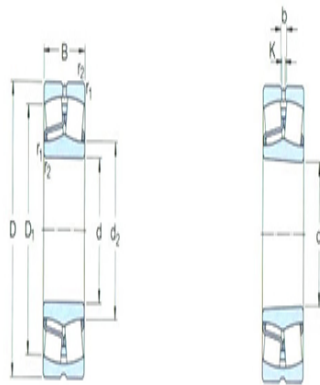

Y1:	1.7
Y2:	2.5
Y0:	1.6