



Model: 23968CCK/W33

Basic size of
mm

d:	340
D:	460
B:	90

The basic rated load is
kN

trends C:	1460
static state Co:	2800
Fatigue load limit Pu:	216

Rated rotation speed is
r/min

Refer to the speed:	1300
limit speed:	1400
quality:	45.5

model

Column hole:	*23968CC/W33
conical bore:	*23968CCK/W33

Dimensions are
mm



d:	340
d ₂ ~ :	373
D1 ~ :	426
b:	11.1
k:	6
r _{1,2} the min:	3

Shoulder gear and chamfer size
mm

d _a the min:	353
Da the max:	447
r _a the max:	2.5

Calculation coefficient

e:	0.17
Y1:	4

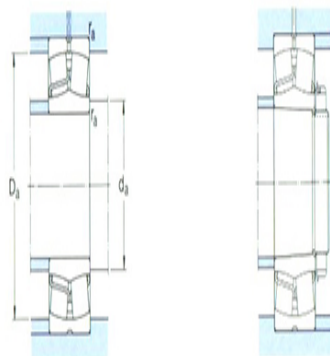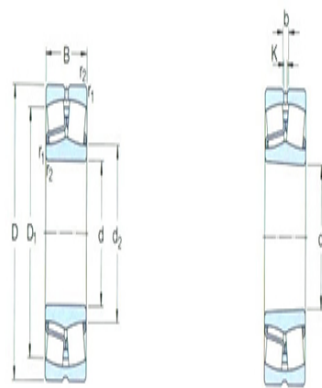

Y2:	5.9
Y0:	4