



**Model: 23068CCK/W33**

Basic size of  
 mm

d:	340
D:	520
B:	133

The basic rated load is  
 kN

trends C:	2700
static state Co:	4550
Fatigue load limit Pu:	335

Rated rotation speed is  
 r/min

Refer to the speed:	1000
limit speed:	1300
quality:	105

model

Column hole:	*23068CC/W33
conical bore:	*23068CCK/W33

Dimensions are  
 mm


d:	340
d <sub>2</sub> ~ :	385
D1 ~ :	468
b:	22.3
k:	12
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	358
Da the max:	502
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.24
Y1:	2.8

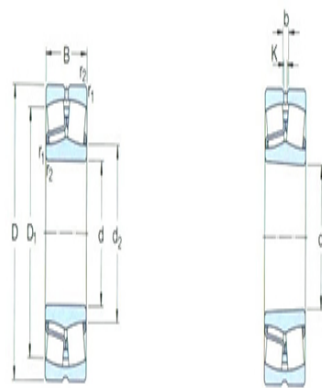

Y2:	4.2
Y0:	2.8