



**Model: 24068CCK30/W33**

Basic size of  
 mm

d:	340
D:	520
B:	180

The basic rated load is  
 kN

trends C:	3450
static state Co:	6200
Fatigue load limit	475
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	750
limit speed:	1100
quality:	140

model

Column hole:	*24068CC/W33
conical bore:	*24068CCK30/W33
	3

Dimensions are  
 mm



d:	340
d <sub>2</sub> ~ :	377
D1 ~ :	453
b:	16.7
k:	9
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	358
Da the max:	502
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.33
----	------

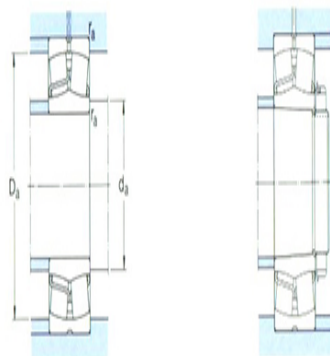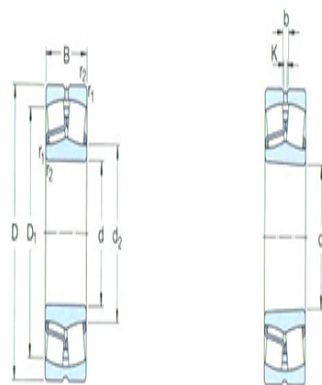

Y1:	2
Y2:	3
Y0:	2