



Model: 23168CCK/W33

Basic size of
 mm

d:	340
D:	580
B:	190

The basic rated load is
 kN

trends C:	4250
static state Co:	6800
Fatigue load limit Pu:	480

Rated rotation speed is
 r/min

Refer to the speed:	800
limit speed:	1000
quality:	210

model

Column hole:	*23168CC/W33
conical bore:	*23168CCK/W33

Dimensions are
 mm


d:	340
d ₂ ~ :	394
D1 ~ :	498
b:	22.3
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	360
Da the max:	560
r _a the max:	4

Calculation coefficient

e:	0.31
Y1:	2.2

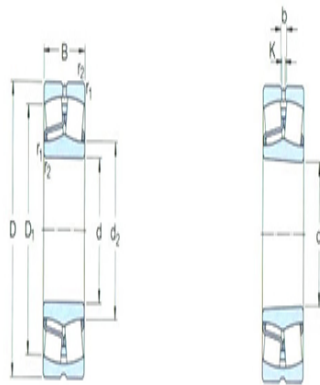

Y2:	3.3
Y0:	2.2