



Model: 23268CAK/W33

Basic size of
 mm

d:	340
D:	620
B:	224

The basic rated load is
 kN

trends C:	5100
static state Co:	7800
Fatigue load limit Pu:	550

Rated rotation speed is
 r/min

Refer to the speed:	560
limit speed:	800
quality:	295

model

Column hole:	*23268CA/W33
conical bore:	*23268CAK/W33

Dimensions are
 mm



d:	340
d ₂ ~ :	426
D1 ~ :	528
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	366
Da the max:	594
r _a the max:	5

Calculation coefficient

e:	0.35
Y1:	1.9

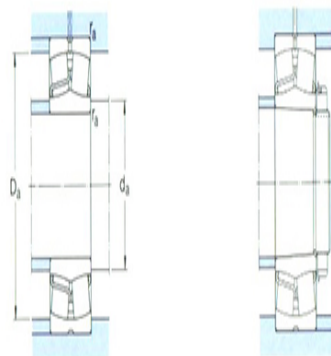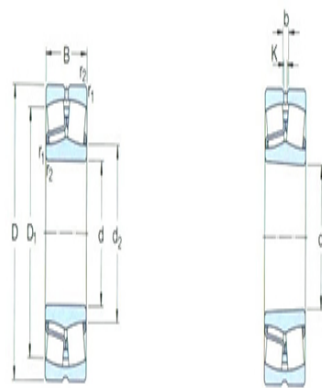

Y2:	2.9
Y0:	1.8