



**Model: 24072CC/W33**

Basic size of  
 mm

d:	360
D:	540
B:	180

The basic rated load is  
 kN

trends C:	3550
static state Co:	6550
Fatigue load limit	490
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	700
limit speed:	1000
quality:	145

model

Column hole:	*24072CC/W33
conical bore:	*24072CCK30/W33
	3

Dimensions are  
 mm



d:	360
d <sub>2</sub> ~ :	397
D1 ~ :	474
b:	16.7
k:	9
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	378
Da the max:	522
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.31
----	------

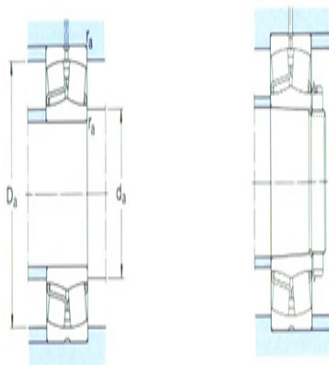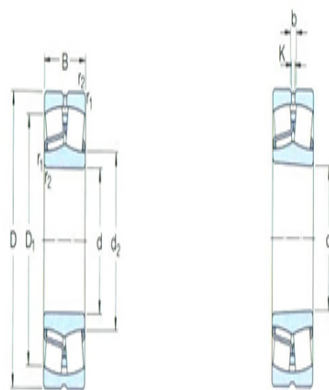

Y1:	2.2
Y2:	3.3
Y0:	2.2