



**Model: 24076CC/W33**

Basic size of  
 mm

d:	380
D:	560
B:	180

The basic rated load is  
 kN

trends C:	3600
static state Co:	6800
Fatigue load limit	480
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	670
limit speed:	950
quality:	150

model

Column hole:	*24076CC/W33
conical bore:	*24076CCK30/W3 3

Dimensions are  
 mm



d:	380
d <sub>2</sub> ~ :	419
D1 ~ :	497
b:	16.7
k:	9
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	398
Da the max:	542
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.3
----	-----

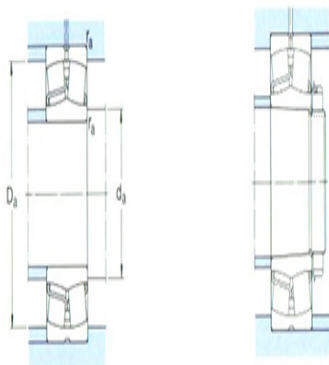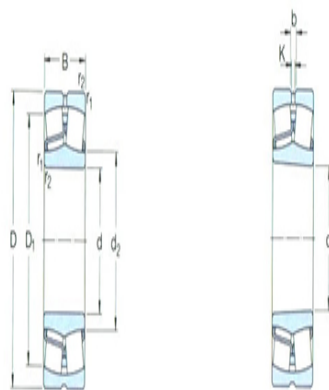

Y1:	2.3
Y2:	3.4
Y0:	2.2