



Model: 24176ECA/W33

Basic size of
 mm

d:	380
D:	620
B:	243

The basic rated load is
 kN

trends C:	5700
static state Co:	9800
Fatigue load limit Pu:	710

Rated rotation speed is
 r/min

Refer to the speed:	480
limit speed:	850
quality:	300

model

Column hole:	*24176ECA/W33
conical bore:	*24176ECAK30/W3 3

Dimensions are
 mm



d:	380
d ₂ ~ :	442
D1 ~ :	532
b:	16.7
k:	9
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	400
Da the max:	600
r _a the max:	4

Calculation coefficient

e:	0.37
----	------

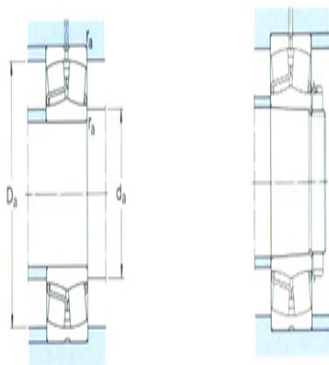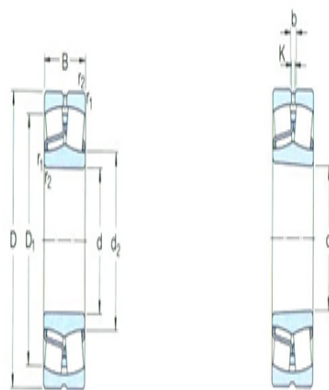

Y1:	1.8
Y2:	2.7
Y0:	1.8