



**Model: 23276CA/W33**

Basic size of  
 mm

d:	380
D:	680
B:	240

The basic rated load is  
 kN



trends C:	5850
static state Co:	9150
Fatigue load limit Pu:	620

Rated rotation speed is  
 r/min

Refer to the speed:	500
limit speed:	750
quality:	375

model

Column hole:	*23276CA/W33
conical bore:	*23276CAK/W33

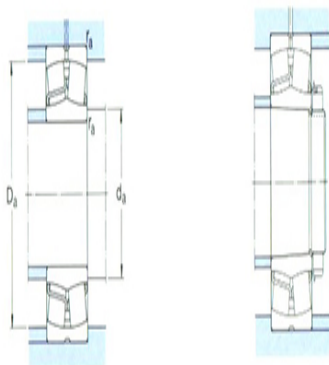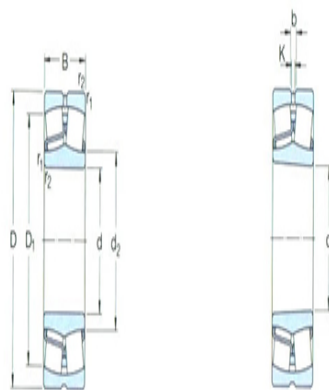

Dimensions are  
 mm

d:	380
d <sub>2</sub> ~ :	471
D1 ~ :	581
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	406
Da the max:	654
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.35
Y1:	1.9

Y2:	2.9
Y0:	1.8