



## Model: 23080CC/W33

Basic size of  
mm

d:	400
D:	600
B:	148

The basic rated load is  
kN



trends C:	3250
static state Co:	5700
Fatigue load limit Pu:	400

Rated rotation speed is  
r/min

Refer to the speed:	850
limit speed:	1100
quality:	150

model

Column hole:	*23080CC/W33
conical bore:	*23080CCK/W33

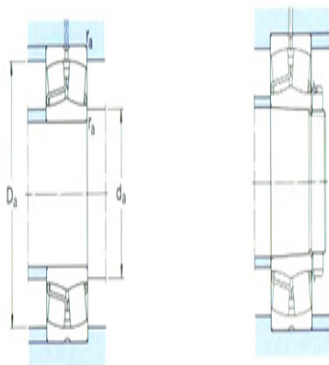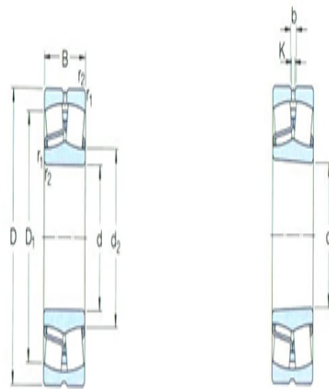

Dimensions are  
mm

d:	400
d <sub>2</sub> ~ :	450
D1 ~ :	543
b:	22.3
k:	12
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	418
Da the max:	582
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.23
Y1:	2.9

Y2:	4.4
Y0:	2.8