



**Model: 24080ECCJ/W33**

Basic size of  
 mm

d:	400
D:	600
B:	200

The basic rated load is  
 kN

trends C:	4300
static state Co:	8000
Fatigue load limit Pu:	560

Rated rotation speed is  
 r/min

Refer to the speed:	630
limit speed:	900
quality:	205

model

Column hole:	*24080ECCJ/W33
conical bore:	*24080ECCK30J/W3 3

Dimensions are  
 mm



d:	400
d <sub>2</sub> ~ :	442
D1 ~ :	527
b:	22.3
k:	12
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	418
Da the max:	582
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.3
----	-----

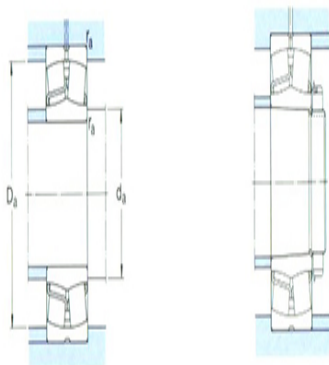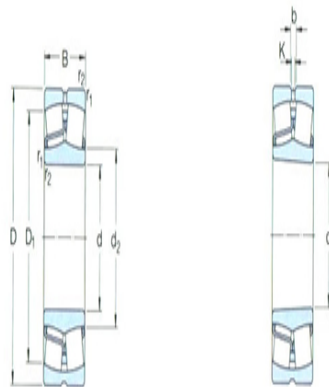

Y1:	2.3
Y2:	3.4
Y0:	2.2