



Model: 24180ECA/W33

Basic size of
 mm

d:	400
D:	650
B:	250

The basic rated load is
 kN

trends C:	6200
static state Co:	10600
Fatigue load limit Pu:	735

Rated rotation speed is
 r/min

Refer to the speed:	430
limit speed:	800
quality:	340

model

Column hole:	*24180ECA/W33
conical bore:	*24180ECAK30/W3 3

Dimensions are
 mm



d:	400
d ₂ ~ :	465
D1 ~ :	559
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	426
Da the max:	624
r _a the max:	5

Calculation coefficient

e:	0.37
----	------

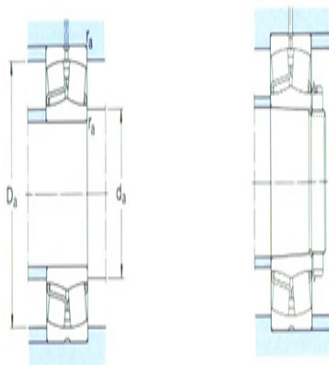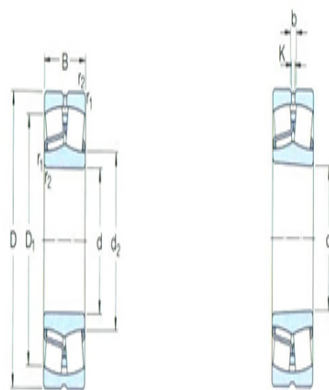

Y1:	1.8
Y2:	2.7
Y0:	1.8