



Model: 23084CA/W33

Basic size of
mm

d:	420
D:	620
B:	150

The basic rated load is
kN


trends C:	3400
static state Co:	6000
Fatigue load limit Pu:	415

Rated rotation speed is
r/min

Refer to the speed:	600
limit speed:	1100
quality:	155


model

Column hole:	*23084CA/W33
conical bore:	*23084CAK/W33

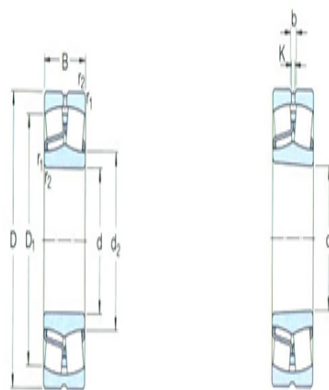

Dimensions are
mm

d:	420
d ₂ ~ :	485
D1 ~ :	563
b:	22.3
k:	12
r _{1,2} the min:	5

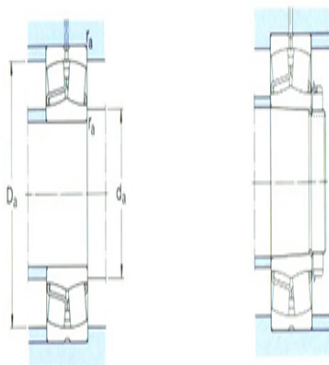

Shoulder gear and chamfer size
mm

d _a the min:	438
Da the max:	602
r _a the max:	4

Calculation coefficient

e:	0.22
Y1:	3

Y2:	4.6
Y0:	2.8