



Model: 24084ECA/W33

Basic size of
 mm

d:	420
D:	620
B:	200

The basic rated load is
 kN

trends C:	4400
static state Co:	8300
Fatigue load limit Pu:	585

Rated rotation speed is
 r/min

Refer to the speed:	530
limit speed:	900
quality:	210

model

Column hole:	*24084ECA/W33
conical bore:	*24084ECAK30/W3 3

Dimensions are
 mm



d:	420
d ₂ ~ :	476
D1 ~ :	547
b:	22.3
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	438
Da the max:	602
r _a the max:	4

Calculation coefficient

e:	0.3
----	-----

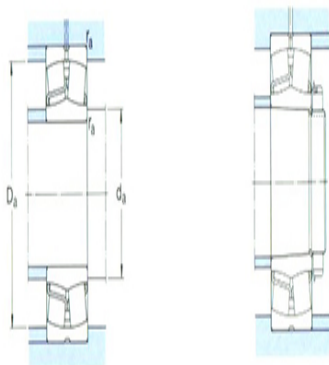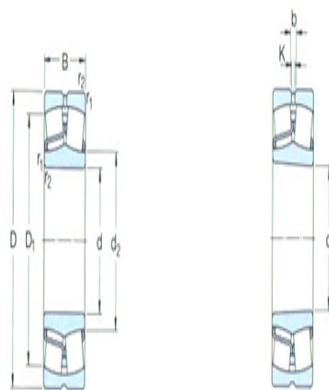

Y1:	2.3
Y2:	3.4
Y0:	2.2