



Model: 24184ECA/W33

Basic size of
mm

d:	420
D:	700
B:	280

The basic rated load is
kN

trends C:	7350
static state Co:	12600
Fatigue load limit Pu:	850

Rated rotation speed is
r/min

Refer to the speed:	400
limit speed:	700
quality:	445

model

Column hole:	*24184ECA/W33
conical bore:	*24184ECAK30/W3 3

Dimensions are
mm



d:	420
d ₂ ~ :	494
D1 ~ :	597
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
mm

d _a the min:	446
Da the max:	674
r _a the max:	5

Calculation coefficient

e:	0.4
----	-----

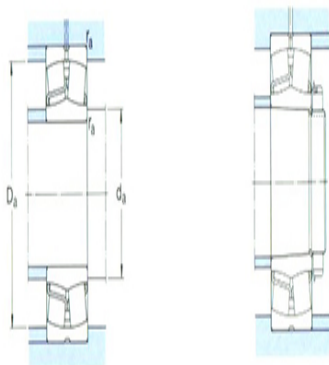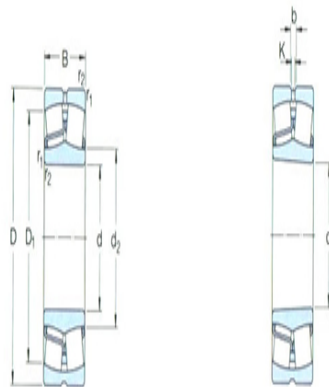

Y1:	1.7
Y2:	2.5
Y0:	1.6