



Model: 23284CA/W33

Basic size of
mm

d:	420
D:	760
B:	272

The basic rated load is
kN



trends C:	7350
static state Co:	11600
Fatigue load limit Pu:	765

Rated rotation speed is
r/min

Refer to the speed:	450
limit speed:	630
quality:	535

model

Column hole:	*23284CA/W33
conical bore:	*23284CAK/W33

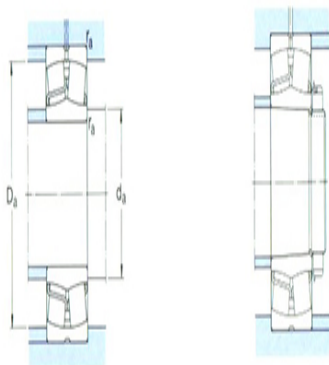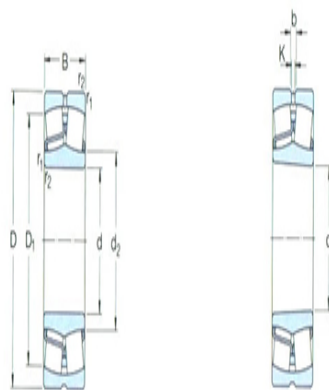

Dimensions are
mm

d:	420
d ₂ ~ :	525
D1 ~ :	649
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
mm

d _a the min:	452
Da the max:	728
r _a the max:	6

Calculation coefficient

e:	0.35
Y1:	1.9

Y2:	2.9
Y0:	1.8