



Model: 23972CCK/W33

Basic size of
 mm

d:	360
D:	480
B:	90

The basic rated load is
 kN



trends C:	1400
static state Co:	2750
Fatigue load limit Pu:	220

Rated rotation speed is
 r/min

Refer to the speed:	1200
limit speed:	1300
quality:	46

model

Column hole:	*23972CC/W33
conical bore:	*23972CCK/W33

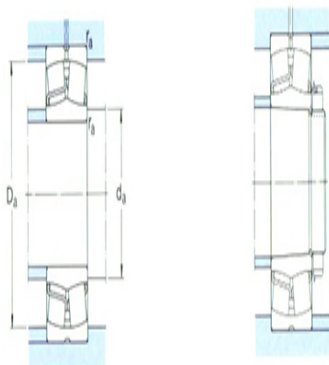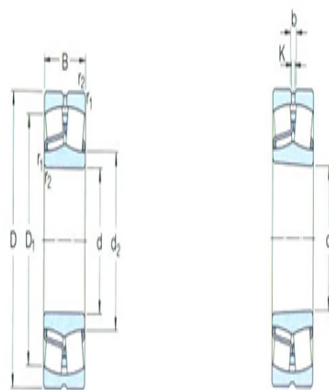

Dimensions are
 mm

d:	360
d ₂ ~ :	394
D1 ~ :	447
b:	11.1
k:	6
r _{1,2} the min:	3

Shoulder gear and chamfer size
 mm

d _a the min:	373
Da the max:	467
r _a the max:	2.5

Calculation coefficient

e:	0.15
Y1:	4.5

Y2:	6.7
Y0:	4.5