



Model: 22272CAK/W33

Basic size of
 mm

d:	360
D:	650
B:	170

The basic rated load is
 kN



trends C:	4300
static state Co:	6200
Fatigue load limit Pu:	440

Rated rotation speed is
 r/min

Refer to the speed:	630
limit speed:	850
quality:	255

model

Column hole:	*22272CA/W33
conical bore:	*22272CAK/W33

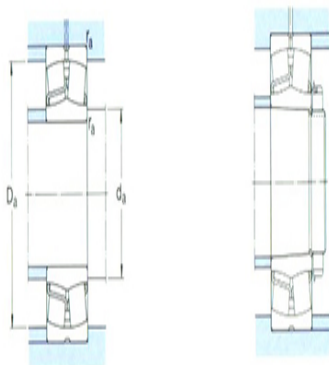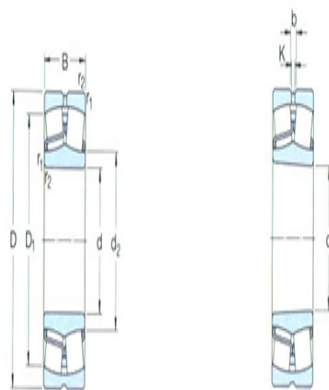

Dimensions are
 mm

d:	360
d ₂ ~ :	453
D1 ~ :	568
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	386
Da the max:	624
r _a the max:	5

Calculation coefficient

e:	0.26
Y1:	2.6

Y2:	3.9
Y0:	2.5