



Model: 23272CAK/W33

Basic size of
 mm

d:	360
D:	650
B:	232

The basic rated load is
 kN



trends C:	5400
static state Co:	8300
Fatigue load limit Pu:	570

Rated rotation speed is
 r/min

Refer to the speed:	530
limit speed:	750
quality:	335

model

Column hole:	*23272CA/W33
conical bore:	*23272CAK/W33

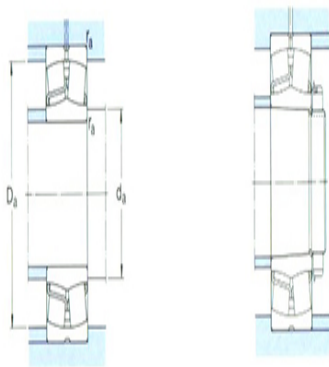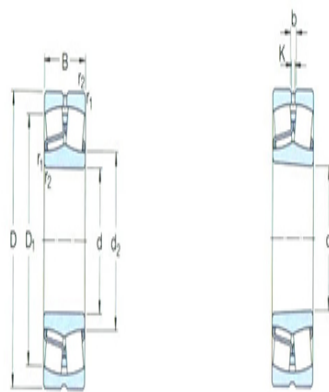

Dimensions are
 mm

d:	360
d ₂ ~ :	447
D1 ~ :	552
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	386
Da the max:	624
r _a the max:	5

Calculation coefficient

e:	0.35
Y1:	1.9

Y2:	2.9
Y0:	1.8