



Model: 23976CCK/W33

Basic size of
mm

| | |
|----|-----|
| d: | 380 |
| D: | 520 |
| B: | 106 |

The basic rated load is
kN



| | |
|------------------------|------|
| trends C: | 1960 |
| static state Co: | 3800 |
| Fatigue load limit Pu: | 285 |

Rated rotation speed is
r/min

| | |
|---------------------|------|
| Refer to the speed: | 1100 |
| limit speed: | 1200 |
| quality: | 69 |

model

| | |
|---------------|---------------|
| Column hole: | *23976CC/W33 |
| conical bore: | *23976CCK/W33 |

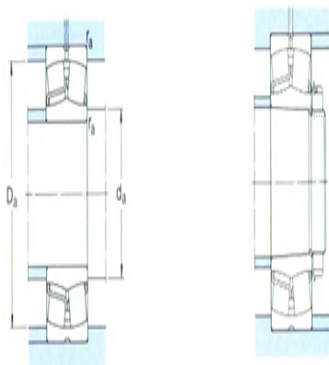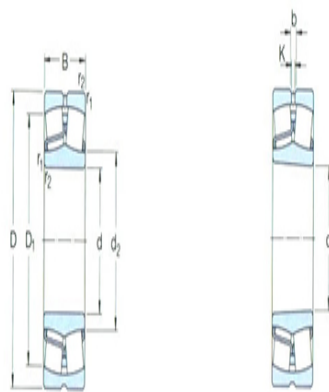

Dimensions are
mm

| | |
|---------------------------|------|
| d: | 380 |
| d ₂ ~ : | 419 |
| D1 ~ : | 481 |
| b: | 13.9 |
| k: | 7.5 |
| r _{1,2} the min: | 4 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|-----|
| d _a the min: | 395 |
| Da the max: | 505 |
| r _a the max: | 3 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.17 |
| Y1: | 4 |

| | |
|-----|-----|
| Y2: | 5.9 |
| Y0: | 4 |