



Model: 23276CAK/W33

Basic size of
mm

d:	380
D:	680
B:	240

The basic rated load is
kN



trends C:	5850
static state Co:	9150
Fatigue load limit Pu:	620

Rated rotation speed is
r/min

Refer to the speed:	500
limit speed:	750
quality:	375

model

Column hole:	*23276CA/W33
conical bore:	*23276CAK/W33

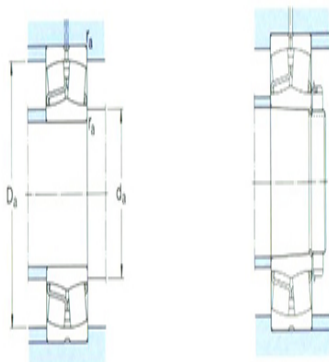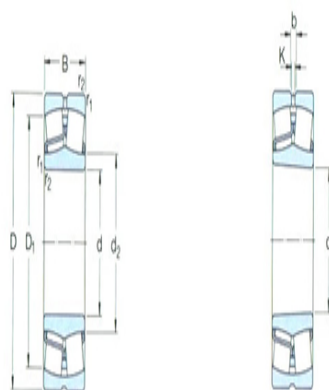

Dimensions are
mm

d:	380
d ₂ ~ :	471
D1 ~ :	581
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
mm

d _a the min:	406
Da the max:	654
r _a the max:	5

Calculation coefficient

e:	0.35
Y1:	1.9

Y2:	2.9
Y0:	1.8