



## Model: 23180CAK/W33

Basic size of  
mm

d:	400
D:	650
B:	200

The basic rated load is  
kN



trends C:	4650
static state Co:	7650
Fatigue load limit Pu:	530

Rated rotation speed is  
r/min

Refer to the speed:	530
limit speed:	950
quality:	265

model

Column hole:	*23180CA/W33
conical bore:	*23180CAK/W33

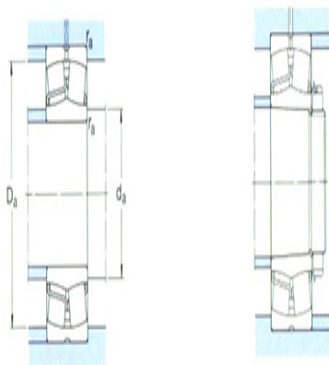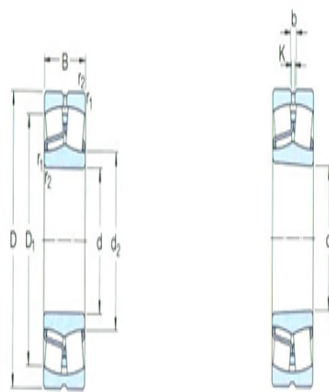

Dimensions are  
mm

d:	400
d <sub>2</sub> ~ :	474
D1 ~ :	566
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	426
Da the max:	624
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.28
Y1:	2.4

Y2:	3.6
Y0:	2.5