



## Model: 23280CAK/W33

Basic size of  
mm

d:	400
D:	720
B:	256

The basic rated load is  
kN



trends C:	6550
static state Co:	10400
Fatigue load limit Pu:	680

Rated rotation speed is  
r/min

Refer to the speed:	480
limit speed:	670
quality:	450

model

Column hole:	*23280CA/W33
conical bore:	*23280CAK/W33

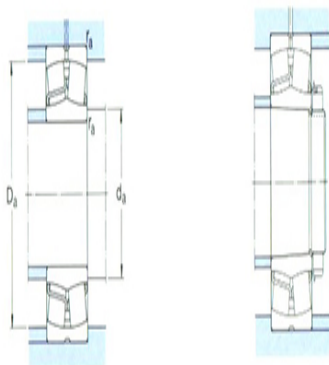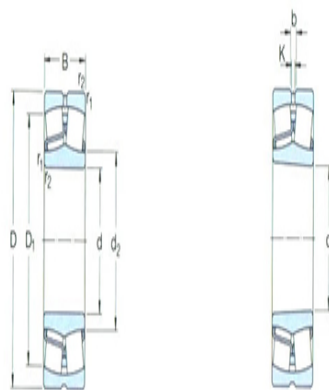

Dimensions are  
mm

d:	400
d <sub>2</sub> ~ :	499
D1 ~ :	615
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	426
Da the max:	694
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.35
Y1:	1.9

Y2:	2.9
Y0:	1.8