



**Model: 22380CAK/W33**

Basic size of  
mm

d:	400
D:	820
B:	243

The basic rated load is  
kN



trends C:	7500
static state Co:	10400
Fatigue load limit Pu:	670

Rated rotation speed is  
r/min

Refer to the speed:	430
limit speed:	750
quality:	650

model

Column hole:	*22380CA/W33
conical bore:	*22380CAK/W33

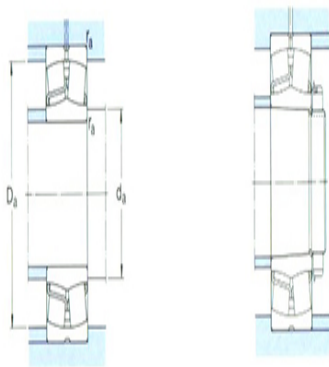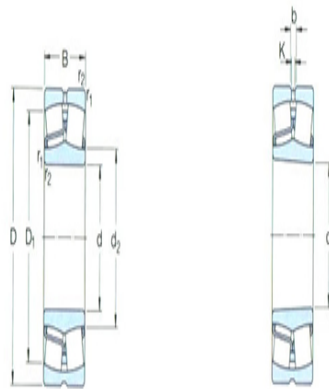

Dimensions are  
mm

d:	400
d <sub>2</sub> ~ :	534
D1 ~ :	697
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	432
Da the max:	788
r <sub>a</sub> the max:	6

Calculation coefficient

e:	0.3
Y1:	2.3

Y2:	3.4
Y0:	2.2