



Model: 23984CCK/W33

Basic size of
 mm

d:	420
D:	560
B:	106

The basic rated load is
 kN



trends C:	2040
static state Co:	4150
Fatigue load limit Pu:	300

Rated rotation speed is
 r/min

Refer to the speed:	1000
limit speed:	1100
quality:	74.5

model

Column hole:	*23984CC/W33
conical bore:	*23984CCK/W33

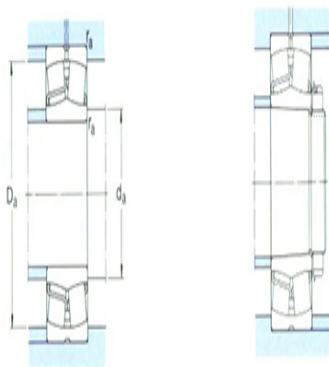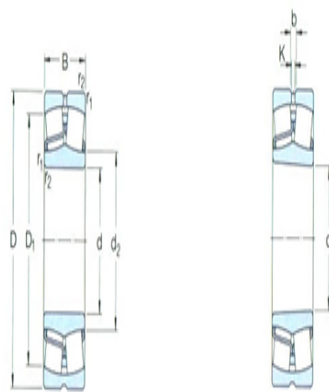

Dimensions are
 mm

d:	420
d ₂ ~ :	459
D1 ~ :	520
b:	16.7
k:	9
r _{1,2} the min:	4

Shoulder gear and chamfer size
 mm

d _a the min:	435
Da the max:	545
r _a the max:	3

Calculation coefficient

e:	0.16
Y1:	4.2

Y2:	6.3
Y0:	4