



## Model: 23184CKJ/W33

Basic size of  
mm

d:	420
D:	700
B:	224

The basic rated load is  
kN



trends C:	5600
static state Co:	9300
Fatigue load limit Pu:	620

Rated rotation speed is  
r/min

Refer to the speed:	480
limit speed:	900
quality:	350

model

Column hole:	*23184CJ/W33
conical bore:	*23184CKJ/W3 3

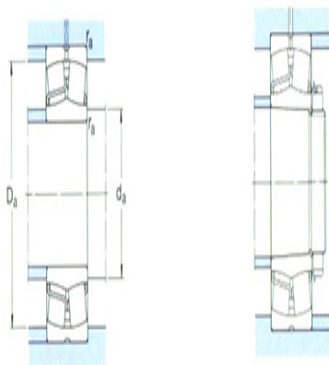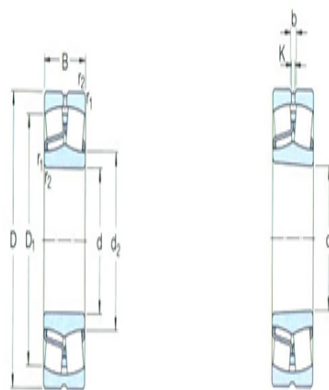

Dimensions are  
mm

d:	420
d <sub>2</sub> ~ :	483
D1 ~ :	607
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	446
Da the max:	674
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.3
Y1:	2.3

Y2:	3.4
Y0:	2.2