



Model: 24088ECA/W33

Basic size of
 mm

d:	440
D:	650
B:	212

The basic rated load is
 kN

trends C:	4800
static state Co:	9150
Fatigue load limit Pu:	630

Rated rotation speed is
 r/min

Refer to the speed:	500
limit speed:	850
quality:	245

model

Column hole:	*24088ECA/W33
conical bore:	*24088ECAK30/W3 3

Dimensions are
 mm



d:	440
d ₂ ~ :	498
D1 ~ :	572
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	463
Da the max:	627
r _a the max:	5

Calculation coefficient

e:	0.3
----	-----

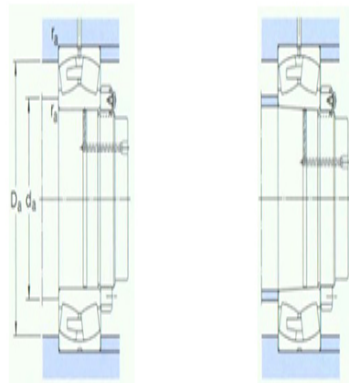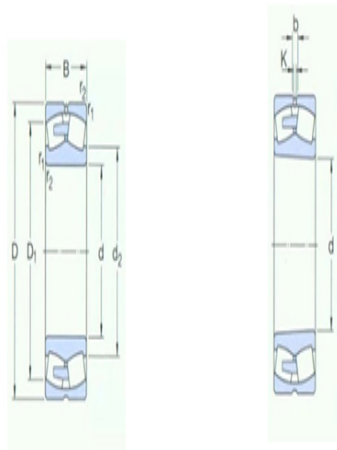

Y1:	2.3
Y2:	3.4
Y0:	2.2