



Model: 24188ECA/W33

Basic size of
 mm

d:	440
D:	720
B:	280

The basic rated load is
 kN

trends C:	7500
static state Co:	13200
Fatigue load limit Pu:	900

Rated rotation speed is
 r/min

Refer to the speed:	400
limit speed:	700
quality:	460

model

Column hole:	*24188ECA/W33
conical bore:	*24188ECAK30/W3 3

Dimensions are
 mm



d:	440
d ₂ ~ :	516
D1 ~ :	618
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	466
Da the max:	694
r _a the max:	5

Calculation coefficient

e:	0.37
----	------

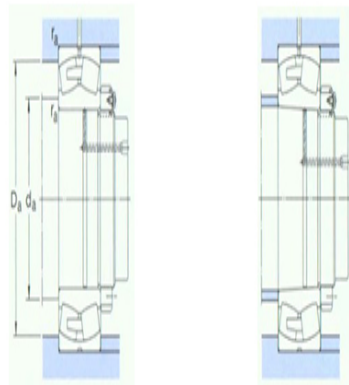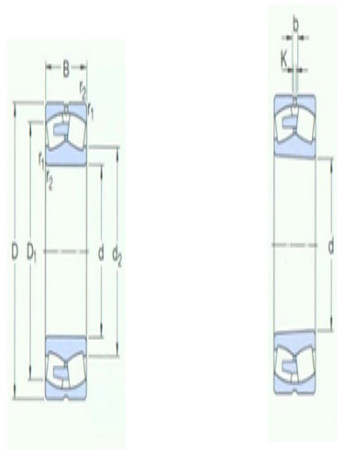

Y1:	1.8
Y2:	2.7
Y0:	1.8