



**Model: 23288CA/W33**

Basic size of  
 mm

d:	440
D:	790
B:	280

The basic rated load is  
 kN

trends C:	7800
static state Co:	12500
Fatigue load limit Pu:	800

Rated rotation speed is  
 r/min

Refer to the speed:	430
limit speed:	600
quality:	590

model

Column hole:	*23288CA/W33
conical bore:	*23288CAK/W33

Dimensions are  
 mm



d:	440
d <sub>2</sub> ~ :	547
D1 ~ :	676
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	472
Da the max:	758
r <sub>a</sub> the max:	6

Calculation coefficient

e:	0.35
Y1:	1.9

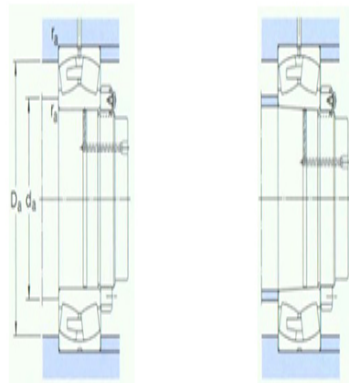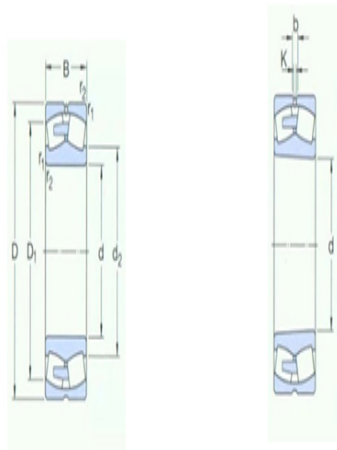

Y2:	2.9
Y0:	1.8