



**Model: 24892CAMA/W20**

Basic size of  
 mm

d:	460
D:	580
B:	118

The basic rated load is  
 kN

trends C:	1790
static state Co:	4900
Fatigue load limit Pu:	345

Rated rotation speed is  
 r/min

Refer to the speed:	560
limit speed:	1100
quality:	75.5

model

Column hole:	24892CAMA/W20
conical bore:	24892CAK30MA/W2 0



Dimensions are  
 mm

d:	460
d <sub>2</sub> ~ :	505
D1 ~ :	541
b:	-
k:	6
r <sub>1,2</sub> the min:	3

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	473
Da the max:	567
r <sub>a</sub> the max:	2.5

Calculation coefficient

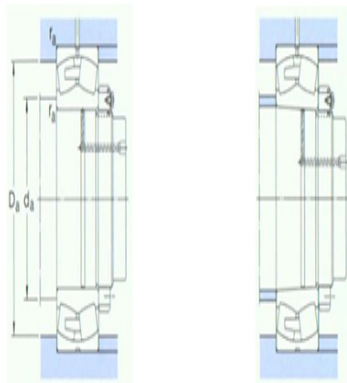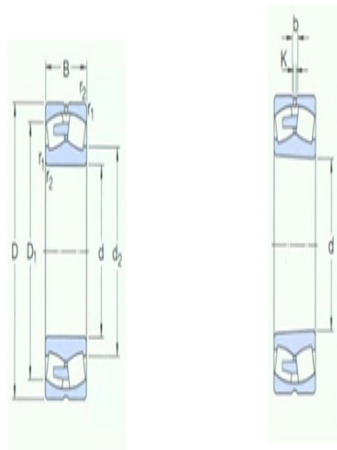

e: 0.17

Y1: 4

Y2: 5.9

Y0: 4