



Model: 23992CA/W33

Basic size of
 mm

d:	460
D:	620
B:	118

The basic rated load is
 kN

trends C:	2500
static state Co:	5000
Fatigue load limit Pu:	355

Rated rotation speed is
 r/min

Refer to the speed:	600
limit speed:	1000
quality:	105

model

Column hole:	*23992CA/W33
conical bore:	*23992CAK/W33

Dimensions are
 mm



d:	460
d ₂ ~ :	512
D1 ~ :	574
b:	16.7
k:	9
r _{1,2} the min:	4

Shoulder gear and chamfer size
 mm

d _a the min:	475
Da the max:	605
r _a the max:	3

Calculation coefficient

e:	0.16
Y1:	4.2

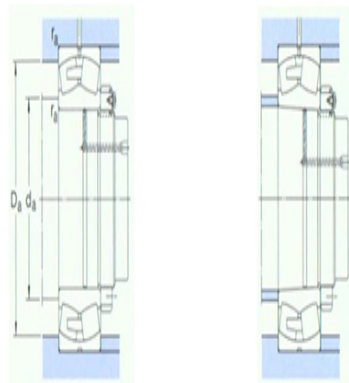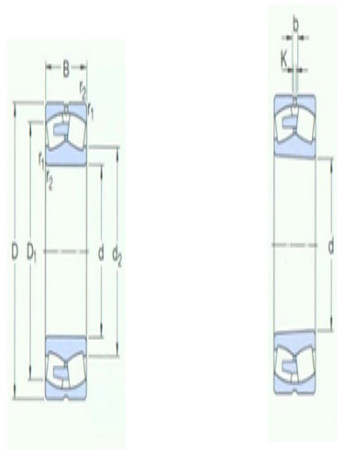

Y2:	6.3
Y0:	4