



Model: 23092CA/W33

Basic size of
 mm

d:	460
D:	680
B:	163

The basic rated load is
 kN

trends C:	3900
static state Co:	6950
Fatigue load limit Pu:	465

Rated rotation speed is
 r/min

Refer to the speed:	560
limit speed:	950
quality:	205

model

Column hole:	*23092CA/W33
conical bore:	*23092CAK/W33

Dimensions are
 mm



d:	460
d ₂ ~ :	531
D1 ~ :	617
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	483
Da the max:	657
r _a the max:	5

Calculation coefficient

e:	0.22
Y1:	3

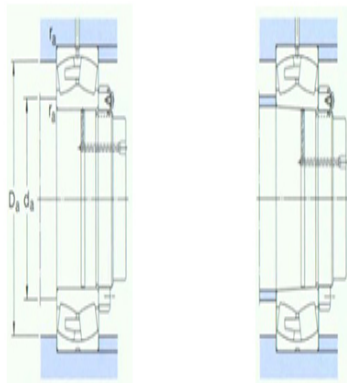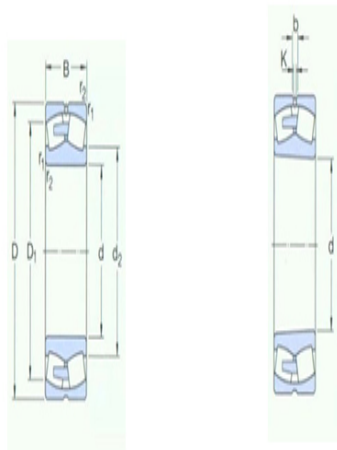

Y2:	4.6
Y0:	2.8