



Model: 24092ECA/W33

Basic size of
 mm

d:	460
D:	680
B:	218

The basic rated load is
 kN

trends C:	5200
static state Co:	10000
Fatigue load limit Pu:	670

Rated rotation speed is
 r/min

Refer to the speed:	480
limit speed:	800
quality:	275

model

Column hole:	*24092ECA/W33
conical bore:	*24092ECAK30/W3 3

Dimensions are
 mm



d:	460
d ₂ ~ :	523
D1 ~ :	601
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	483
Da the max:	657
r _a the max:	5

Calculation coefficient

e:	0.28
----	------

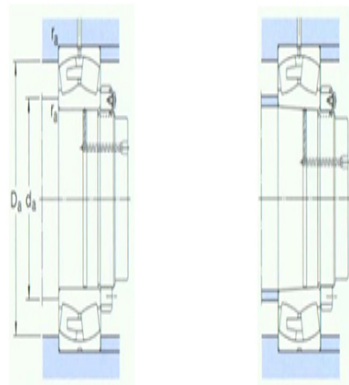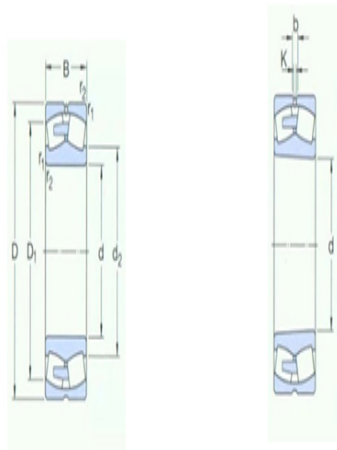

Y1:	2.4
Y2:	3.6
Y0:	2.5