



Model: 23192CA/W33

Basic size of
 mm

d:	460
D:	760
B:	240

The basic rated load is
 kN

trends C:	6400
static state Co:	10800
Fatigue load limit Pu:	680

Rated rotation speed is
 r/min

Refer to the speed:	430
limit speed:	800
quality:	440

model

Column hole:	*23192CA/W33
conical bore:	*23192CAK/W33

Dimensions are
 mm



d:	460
d ₂ ~ :	553
D1 ~ :	666
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	492
Da the max:	728
r _a the max:	6

Calculation coefficient

e:	0.3
Y1:	2.3

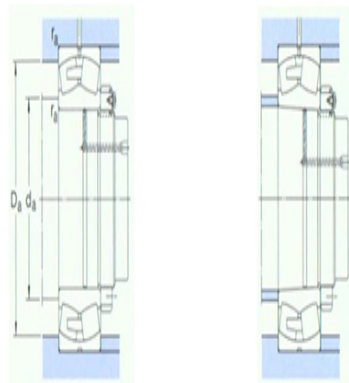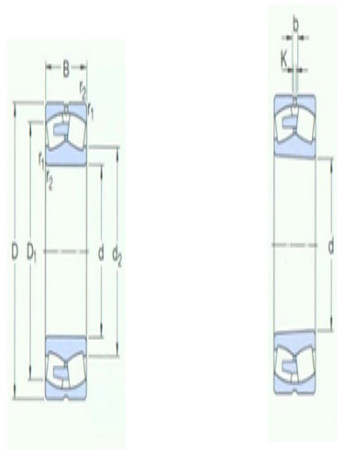

Y2:	3.4
Y0:	2.2