



**Model: 24192ECA/W33**

Basic size of  
 mm

d:	460
D:	760
B:	300

The basic rated load is  
 kN

trends C:	8300
static state Co:	14600
Fatigue load limit Pu:	1000

Rated rotation speed is  
 r/min

Refer to the speed:	360
limit speed:	670
quality:	560

model

Column hole:	*24192ECA/W33
conical bore:	*24192ECAK30/W3 3

Dimensions are  
 mm



d:	460
d <sub>2</sub> ~ :	544
D1 ~ :	649
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	492
Da the max:	728
r <sub>a</sub> the max:	6

Calculation coefficient

e:	0.37
----	------

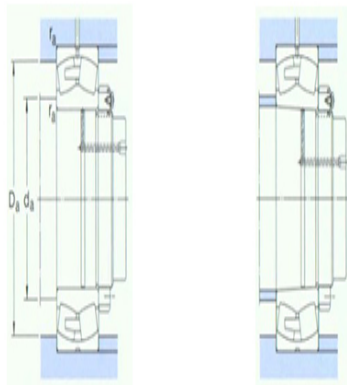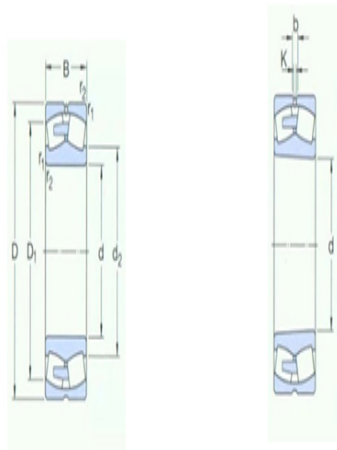

Y1:	1.8
Y2:	2.7
Y0:	1.8